


Technical Catalogue



MINIMAX PUMPS PVT. LTD.
AN ISO 9001:2008 COMPANY

MP 35

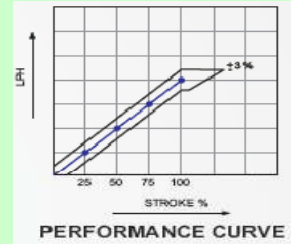

SELECTION CHART


PUMP SPEED – 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNGER Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED – 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. mmNB/BSP	Motor k.w				Cap. LPH	Suc. Del. NB/BSP	Motor (Kw)
24	15	1.5	MP 35	12	275	48	15	1.5
59	15			20	200	119	15	
86	15			24	155	171	15	
152	25			32	87	304	25	
238	25	2.2		40	56	475	25	2.2
342	25			48	39	684	25	
433	25			54	31	866	25	
571	25	1.1		62	23	1142	40	
627	25			65	21	1255	40	
770	25			72	17	1540	40	
1023	40	2.2	84	13	2046	40		
1203	40		90	11	2406	40		
1484	40		100	9	3000	40		

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	SS304,SS316,SS304L, SS316L	1	Plunger Ring	PTFE
2	Liquid Head	SS304, SS316, alloy20	2	Gland Packing	PTFE
3	Through bush	SS304, SS316, alloy20	3	NRV Balls	SS, PTFE, Glass Ceramic
4	Non Return Valves	SS304, SS316, alloy20 PP, PVC, PTFE			

FEATURES

- Multiple head plunger pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

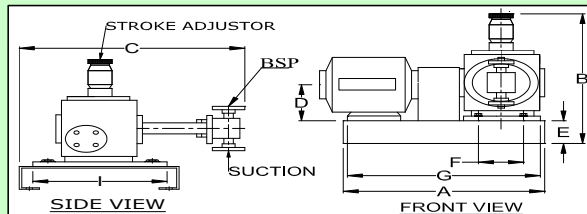

DIMENSIONS IN MM

MODEL	A	B	C	D	E	F	G	I
MM III	605	490	585	45	70	70	577	305

WEIGHT (App) : 135 KG.
PACKING SIZE : 28 X 24 X 23 inches



MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328, MIDC,
SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.
Tel. : +91-253-6649383 Cell : +91-9130022891, 9130022894
E-mail : minimaxpumpsprivtltd@gmail.com

[Web:www.dosingpumpsindia.co.in](http://www.dosingpumpsindia.co.in) / www.minimaxdosing.co.in,



ISO 9001 2008