
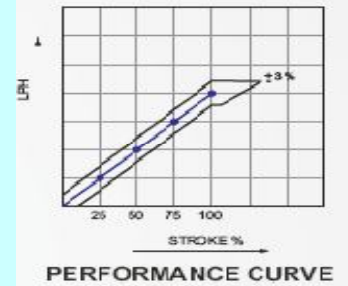


## HDMP-60 S3

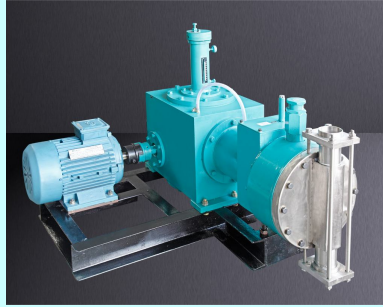

### SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				MODEL	PL. Dia mm	Max. Pr. Kg/cm <sup>2</sup>	PUMP SPEED - 185 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM					
Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w		
587	25	80	3.7	HDMP 60 S3	48	50	80	5.5	1172	40	50	3.7
742	25				54	47			1485	40		
979	25				62	45			1957	40		
1074	40	66	42		2216	40						
1320	40	72	28		2639	40						
1753	40	82	24		3420	80X50						
2061	40	90	19		4122	80X50	30	5.5				
2545	80X50	100	15		5089	80X80						
3080	80X50	110	12		6158	80X80						
3664	80X50				120	10	7329	80X80				

### MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	EN 8	4	NRV Sealing Ring	PTFE
2	Liquid Head	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE	5	NRV Balls	SS, PTFE, Glass, Ceramic
3	Non Return	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE			

### FEATURES

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

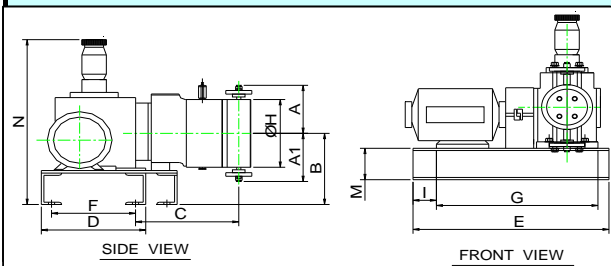

### DIMENSIONS IN MM

A	A1	B	C	D	E
285	285	275	445	495	810
F	G	H	I	M	N
460	670	Ø290	100	75	640

WEIGHT (App) : 220 KG.

PACKING SIZE : 36 x 42 x 31 Inches

# MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICO, 328, MIDC,  
SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.  
Tel. : +91-253-6649383  
Mobile : +91-9130022891, 9130022894, 9130022893  
E-mail : minimaxpumpsprivateltd@gmail.com

[www.dosingpumpsindia.co.in](http://www.dosingpumpsindia.co.in) / [www.minimaxdosing.co.in](http://www.minimaxdosing.co.in)

Website



ISO 9001 2008